


# MLB 100x200 BATTERY

TECHNICAL SHEET

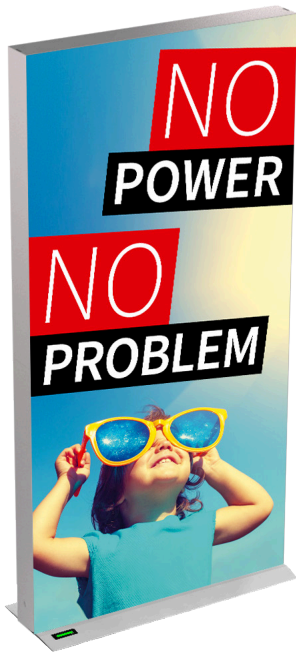

### PRODUCT DESCRIPTION

The Mobile Light Box system powered by SEGO seamlessly integrates cutting-edge technology with user-friendly design. Boasting a toolless assembly down to its foundation, Mobile Light Box is crafted to enhance your display experience. Magnetic electrical connectors illuminate the pre-installed UL certified LED lights within the profiles, ensuring a sleek appearance with concealed wires. The aluminum frame supports edge-to-edge customizable SEG backlit fabric graphics on both the front and back. Beyond its visual appeal, Mobile Light Box is portable, modular, and highly coveted, setting it apart from other lightboxes. Every detail has been meticulously considered, right down to the durable foam-cut carry bag, which is uniquely designed to safeguard and organize all components.

DISPLAY DIMENSIONS MLB BATTERY 100 x 200 cm (39.37" x 78.74")

### DISPLAY CONSTRUCTION

Aluminum extrusion frame with plastic components

### GRAPHIC MATERIAL

Dye Sub Backlit Fabric

### GRAPHIC FINISHING

Silicone beading sewn onto edge of graphic

### SHIPPING WEIGHTS & DIMENSIONS

| 100 x 200 BATTERY | 49 x 14 x 8 | 34.0 lbs. |
|-------------------|-------------|-----------|
|                   | 45 x 21 x 6 | 32.0 lbs. |

### LED LIGHT SPECIFICATION

|                       |           |
|-----------------------|-----------|
| BRAND                 | Osram     |
| POWER                 | 3W        |
| CCT (COLOR TEMP)      | 6800k     |
| AVERAGE BEAM ANGEL    | 20 °      |
| LM/W                  | 130       |
| AVG LM/M <sup>2</sup> | 4800-5800 |
| VOLTAGE INPUT         | 24V       |

### LUMENS

|             |       |
|-------------|-------|
| VOLTAGE (V) | 24    |
| POWER (W)   | 90    |
| LM/W        | 130   |
| TOTAL LM    | 11700 |
| AVG LM      | 5850  |
| CU          | .8    |
| EAV         | 4680  |

### TRANSFORMER SPECIFICATION


|                 |             |
|-----------------|-------------|
| POWER RATE      | 90W (1 pcs) |
| TRANSFORMER     |             |
| CERTIFICATES    | UL, CE, GEM |
| VOLTAGE INPUT   | 100-240V    |
| VOLTAGE OUTPUT  | 25.2V       |
| BATTERY RUNTIME | 11 – 12 HRS |



TOOL FREE CONNECTION



MAGNETIC WIRE CONNECTION




CLEAN CABLE MANAGEMENT



TOOL FREE FOOT CONNECTION

PARTS LIST




(qty 2)  
Horizontal Profile




(qty 2)  
Vertical Profile Top




(qty 2)  
Vertical Profile Bottom




(qty 1)  
Mid Pole



(qty 1)  
Battery Base




(qty 1)  
Charger



(qty 2)  
Travel Bag

## SET UP INSTRUCTIONS


①

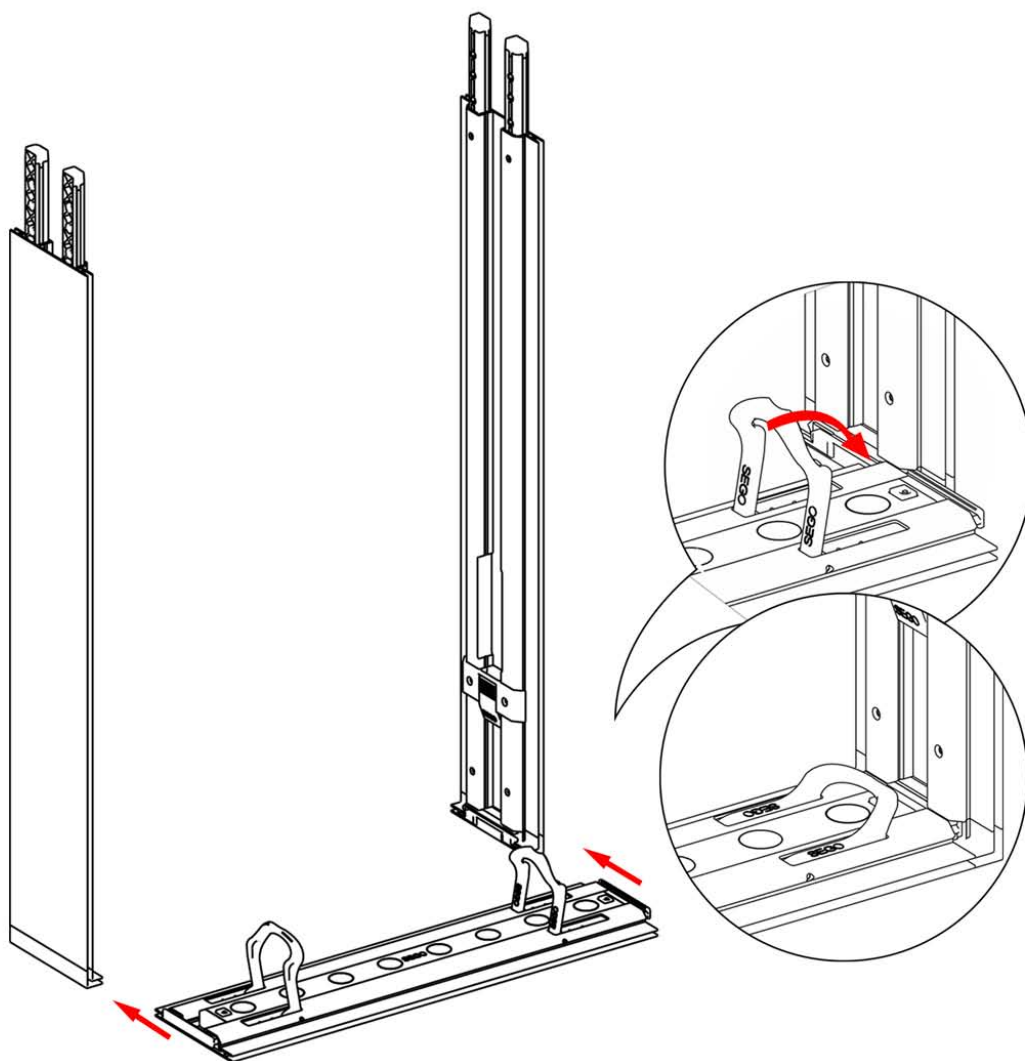

# MLB 100x200 BATTERY

TECHNICAL SHEET


②

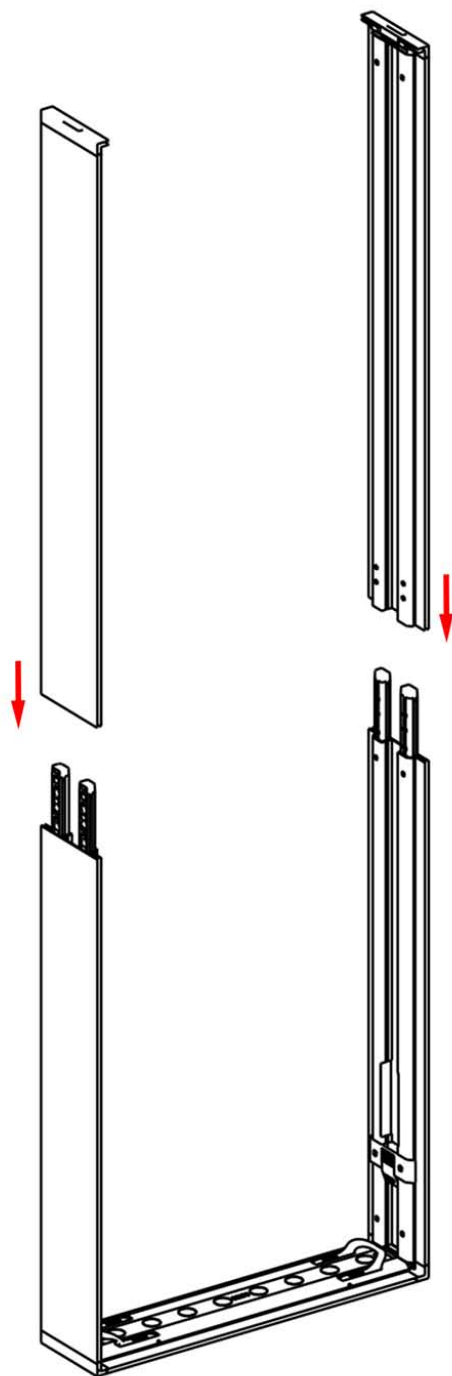

# MLB 100x200 BATTERY

TECHNICAL SHEET


③

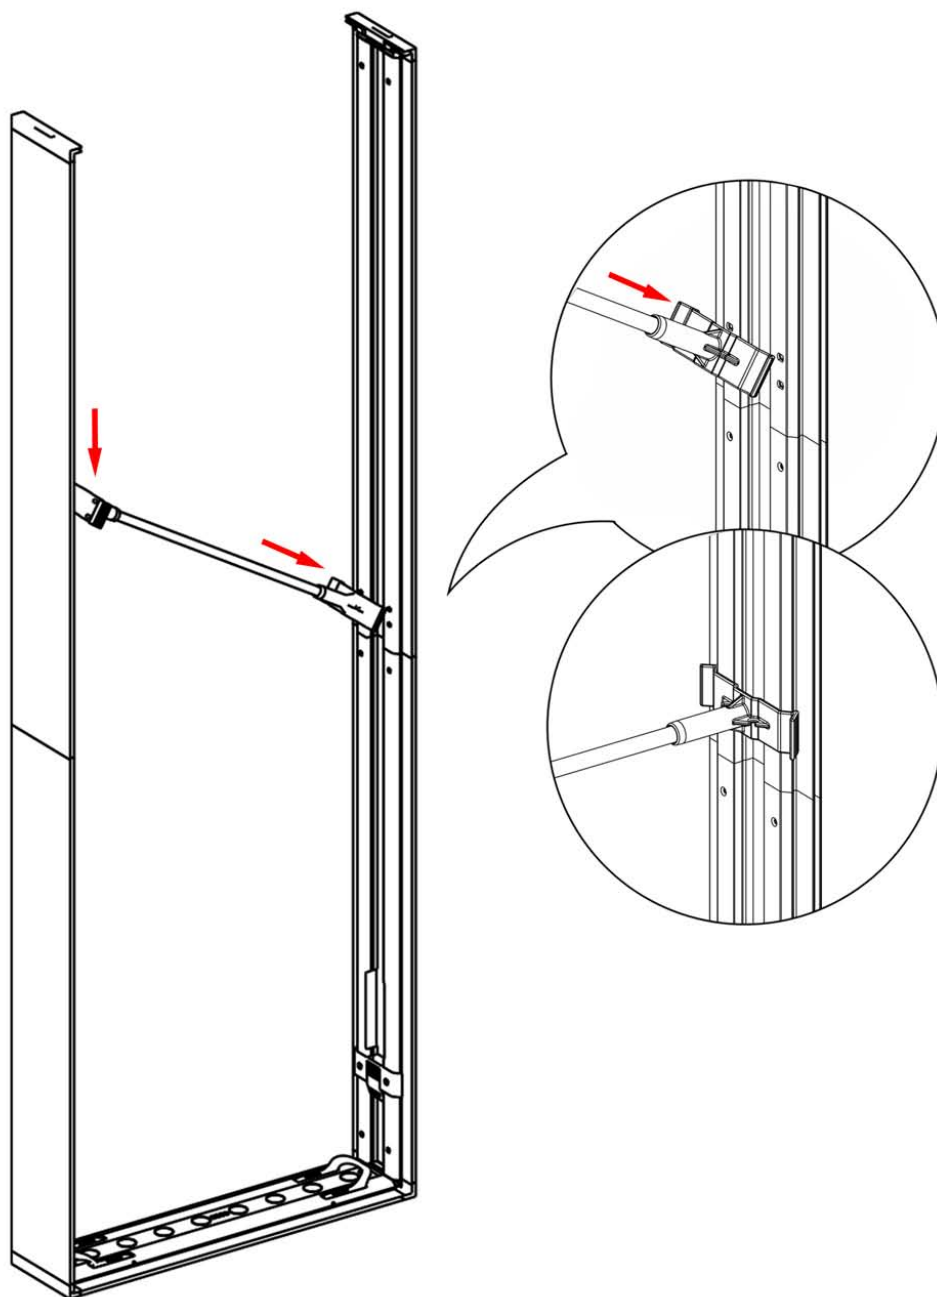

# MLB 100x200 BATTERY

TECHNICAL SHEET


④

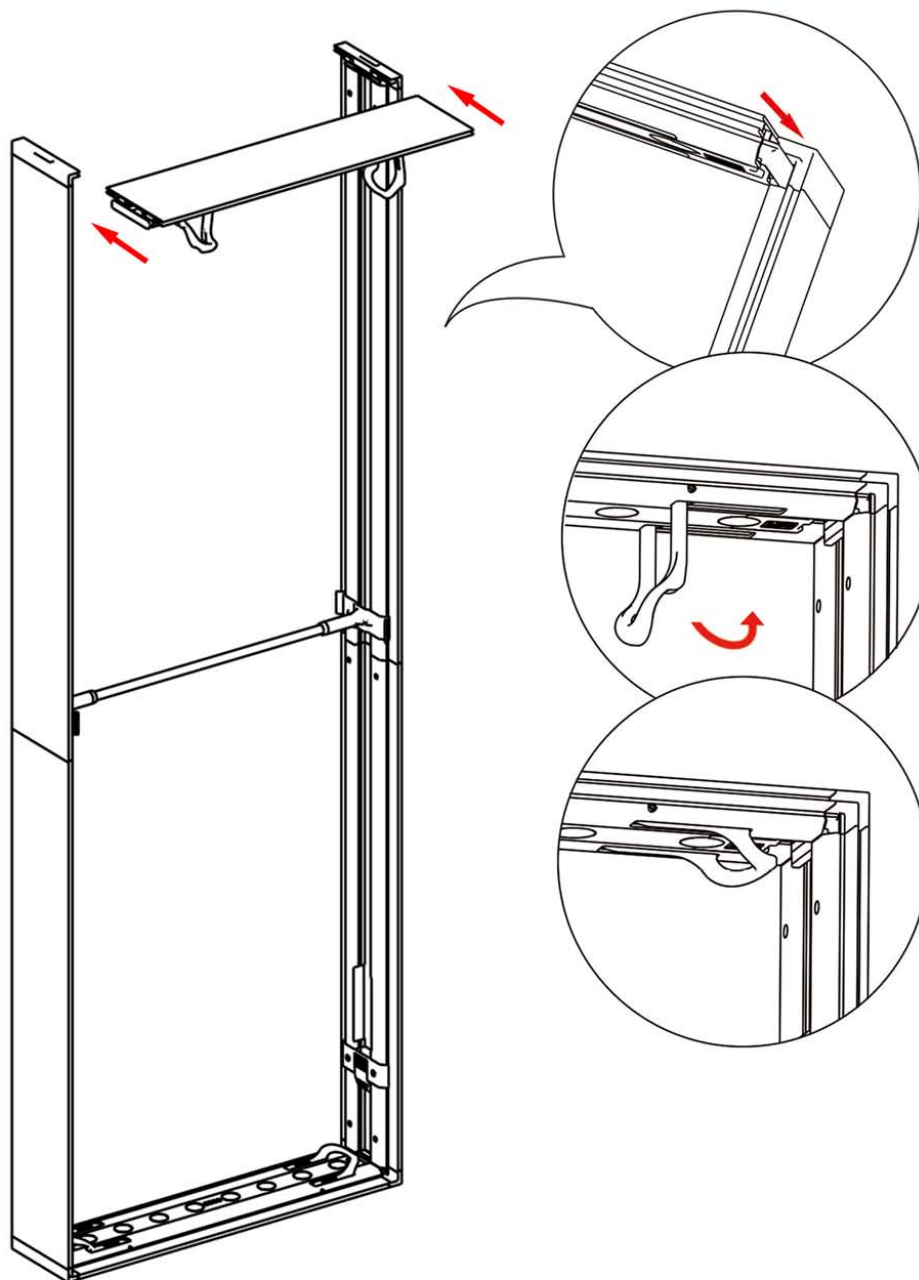

# MLB 100x200 BATTERY

TECHNICAL SHEET


⑤

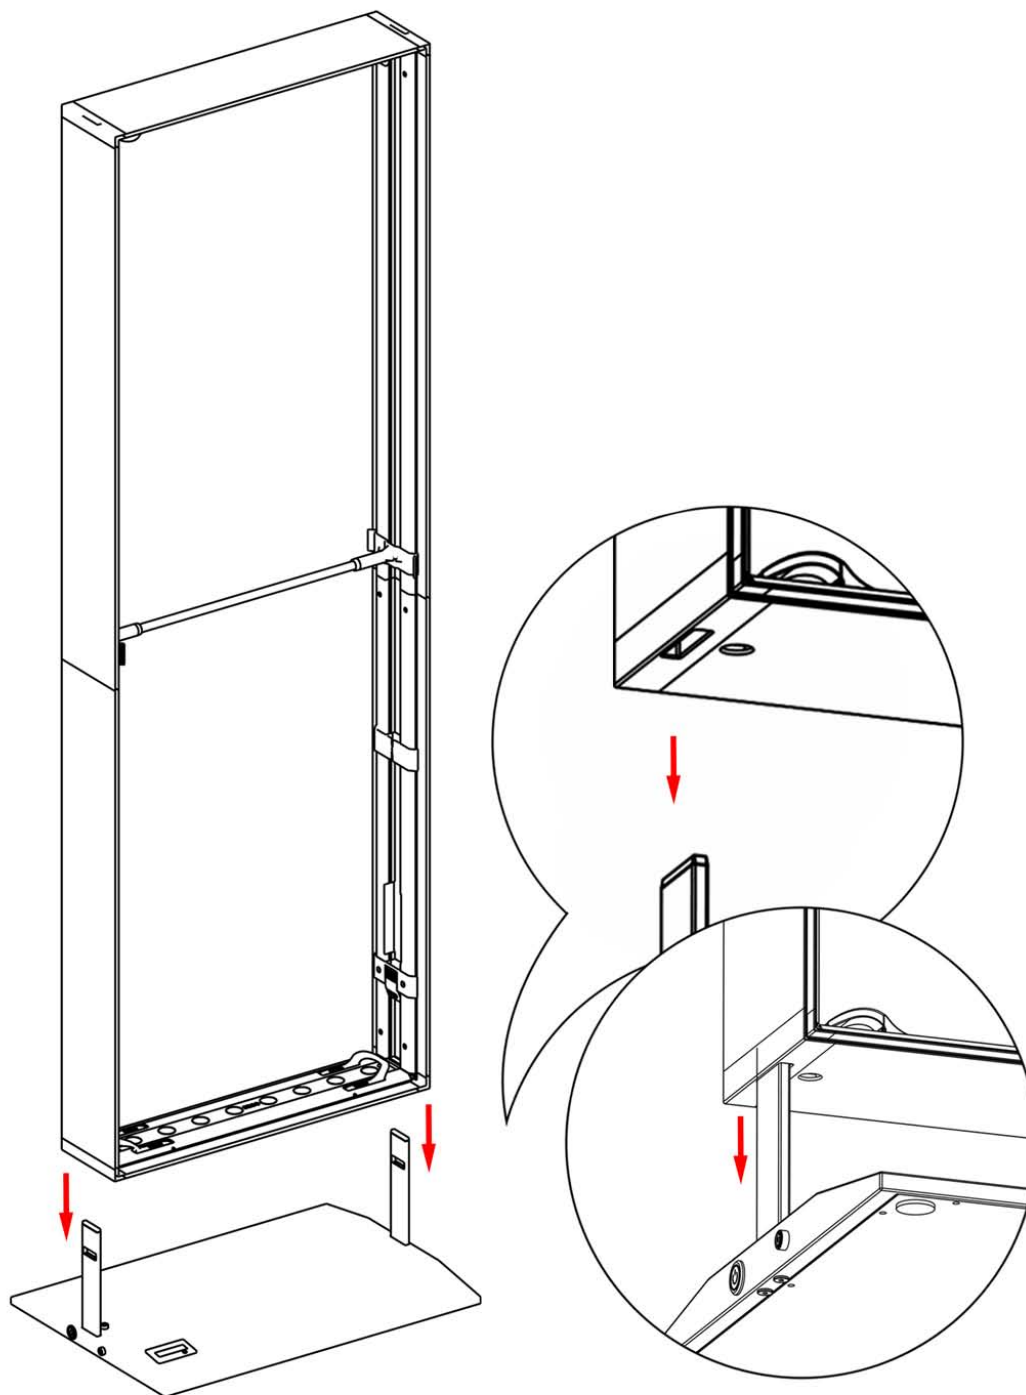

# MLB 100x200 BATTERY

TECHNICAL SHEET

⑥

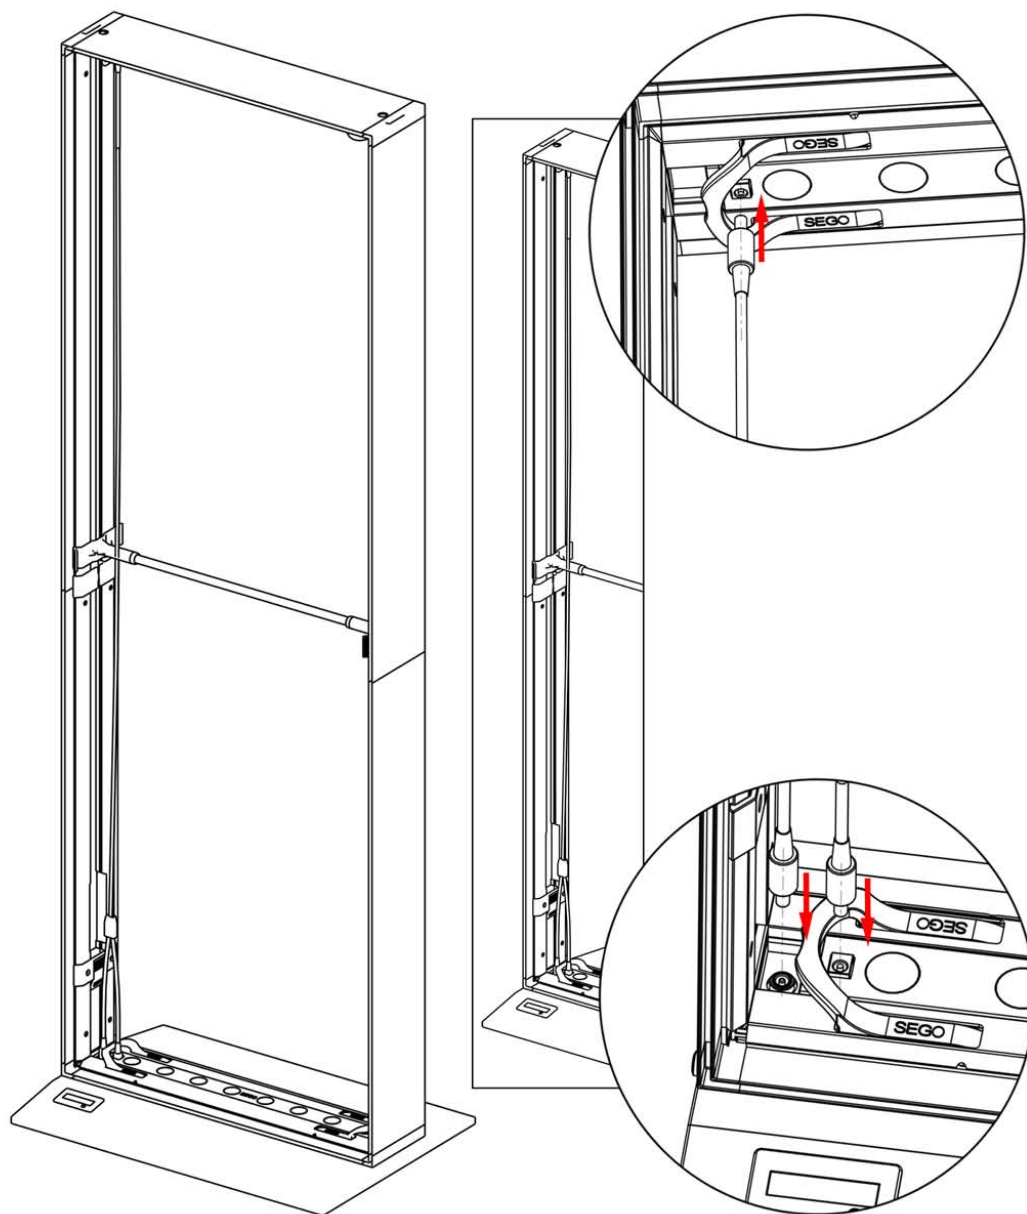




# MLB 100x200 BATTERY

TECHNICAL SHEET

7

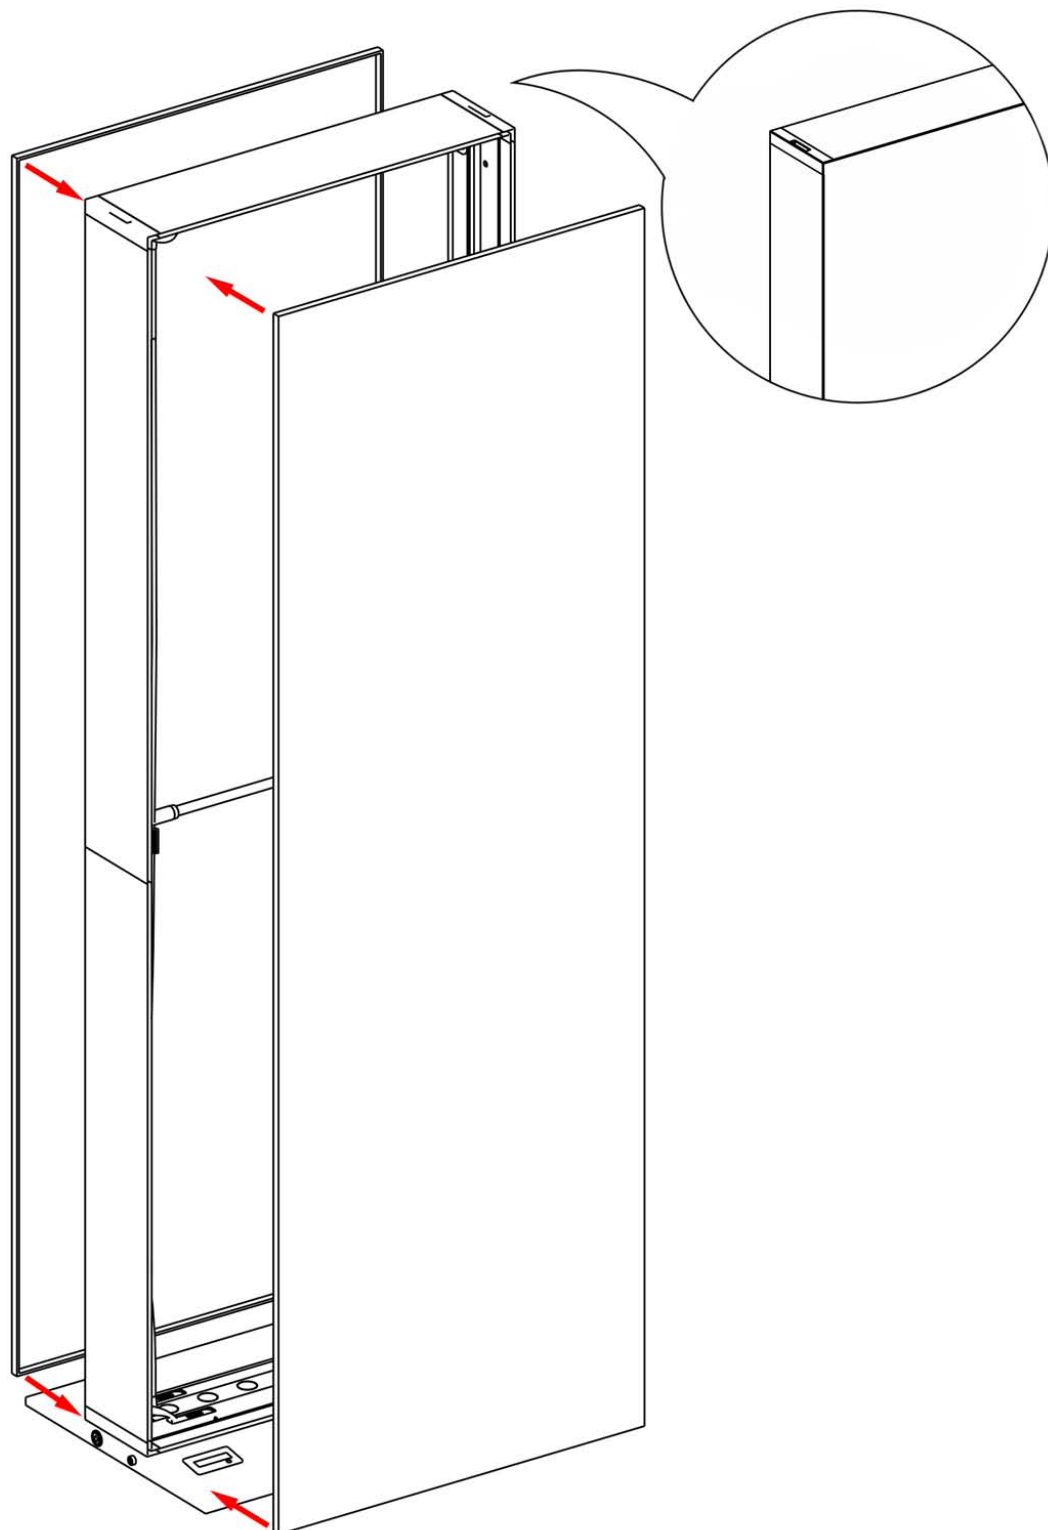

# MLB 100x200 BATTERY

TECHNICAL SHEET

⑧

